
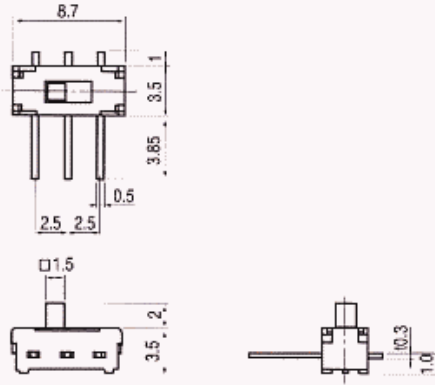


# SLIDE SWITCHES



SS120F



## Specification

Rating	15V DC, 0.1A
Poles - Throws	1C - 2P
Stroke	2.0 mm
Operating Force	250 ± 150 gf
Timing	Non Shorting
Optional Stems and Size	F : 2



SS1245

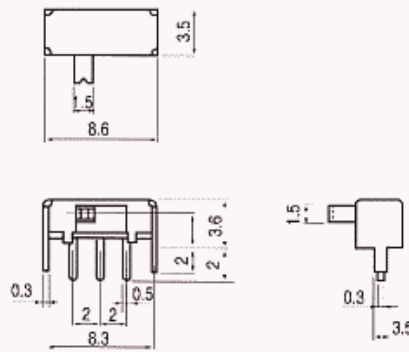

## Specification

Rating	50V DC, 0.3A
Poles - Throws	1C - 2P
Stroke	2.0 mm
Operating Force	250 ± 100 gf
Timing	Non Shorting
Optional Stems and Size	V : 2, 4



SS122

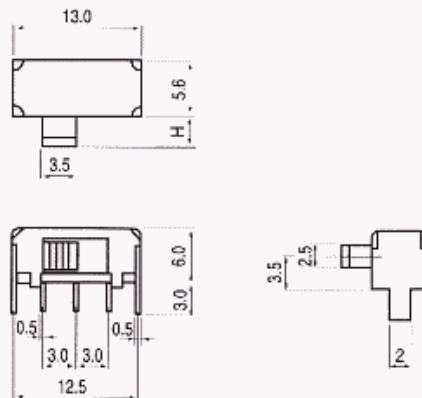

## Specification

Rating	30V DC, 0.2A
Poles - Throws	1C - 2P
Stroke	2.5 mm
Operating Force	250 ± 100 gf
Timing	Non Shorting
Optional Stems and Size	G : 6

SS126

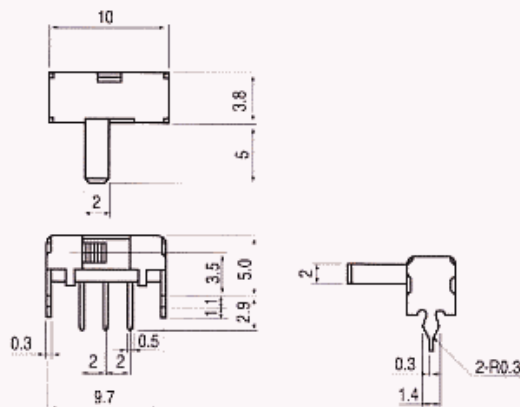

## Specification

Rating	30V DC, 0.2A
Poles - Throws	1C - 2P
Stroke	2.0 mm
Operating Force	200 ± 100 gf
Timing	Non Shorting
Optional Stems and Size	G : 5